


PROJECT: TYPE:

LOCATION: CAT:

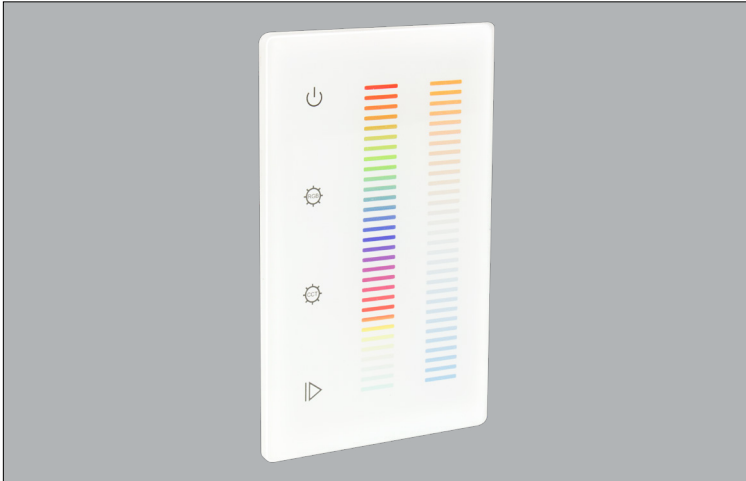

Description

Back-lit touch wall control for tunable CCT light control; 1-4 operation with 1-3 scene control.

Features

- Touch for On/Off control
- Swipe for RGB or 2700K-6000K light control
- Toggle between RGB and 2700K-6000K or have both on simultaneously
- Smooth glass faceplate with illuminated controls
- Carry reliable DMX 512 signals up to 400 feet
- Requires DMX receiver for install (sold separately)

Mounting

Flush mount to wall or flat surface (1-3/4" x 2-5/8" cut-out)

Applications

RGB + Tunable CCT Control

Warranty


3 years

Technical Information



Voltage	12-24V DC
Power Consumption	200mA
Output	DMX 512 Signal
Operating Temperature	0° - 40°C
Relative Humidity	8% - 80%
Rating	FCC Compliant, RoHS Compliant, dry location

Dimensions

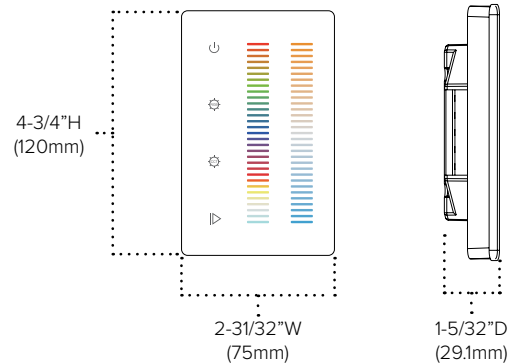

Recommended Receivers

Part Number	Description	Application	Input	Current	Output	Listing	Dimensions
REC-DMX-RJ45A-5CH	DMX 512 5Channel Receiver	Dry location	12-24V DC	5x8A	5x(96-192)W	RoHS	6-1/2" x 2-29/32" x 1-15/32" (178.9mm x 45.5mm x 18.6mm)

Controller can be powered from secondary side of 12-24V DC driver being used to power the receiver/tape light. See 'Control Options' on selected tape light for more information.

Ordering Information

**DMX RGB +
Tunable CCT
Touch Wall
Control**



DMX-RGBTW-1Z includes:

- (1) DMX RGB + Tunable CCT Touch Wall Control (requires DMX receiver, sold separately)