

PROJECT: TYPE:

LOCATION: CAT:

Description

Economical and versatile tape light with tunable light output in high output, spec grade, and double row versions.

Features

- Unjacketed (IP54) rating
- Controllers, receivers, power supplies, and extrusions are available for tape light (sold separately - TLD does not have linking accessories)

Mounting

Surface mount via attached 3M adhesive tape, mounting clips, or aluminum extrusions (sold separately). Recommended use for TLD is to mount via an aluminum extrusion (sold separately) to allow proper dissipation of heat


Applications

Task or accent lighting, edge lighting, cabinetry, shelving, coves, staircases, toe kicks, railings, display cases




Technical Information

Series	TLD (Double Row)
IP Rating	IP54
Voltage	24V DC
CCT	2700K-6000K Tunable CCT
CRI	90+
Wattage	up to 5.8W/ft
Lumens	400Lm/ft
Max Run	16.4ft
Cutting	1.97"
Dimming	Tunable CCT Controllers
LED	2 x LEDs spaced every 0.33" (8.33mm)
Beam	120°
Operating Temp	-25°C (-13°F) to 40°C (104°F)
Rating	cULus Listed, dry & damp locations
Rated Life	50,000 Hours



When using standard snap connectors, it is recommended to scrape off the coating from each conductor to ensure a proper connection. When using heavy duty snap connectors, this is only necessary for IP65 and IP68 types.

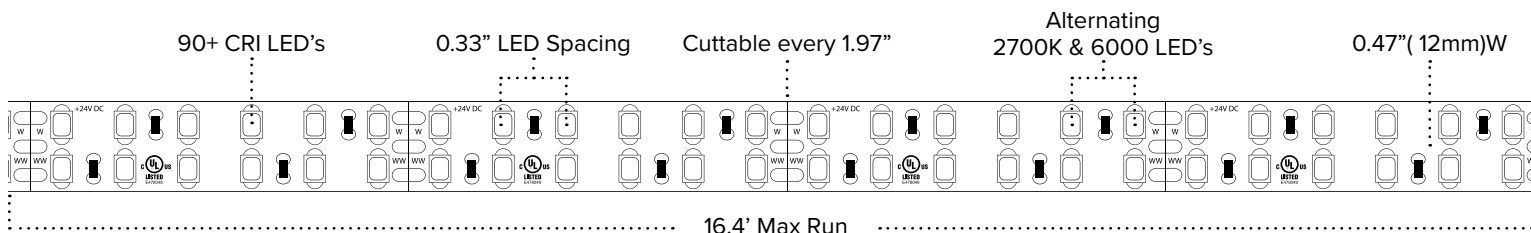

Dimensions: TLD IP54 Tunable CCT



Ordering Information

**24V 16.4ft
TLD-TW Series**

PRIZM **PZM** — GRADE **TLD** — CCT **TW**

TLD = Double Row IP54 16.4ft Reel
TW = 2700K-6000K Tunable CCT

Double Row tape light is offered exclusively in Custom Cut (special order) lengths.

Please contact us at: Quotes@PrizmLighting.com

Recommended Power Supplies

SERIES	RATED POWER AVAILABLE
LED-DR Series	30W, 60W, 96W, 150W
ELV Series	30W, 45W, 60W, 80W
ADPT-DRJ Series	30W, 60W, 96W

NOTES
