

PROJECT: TYPE:

LOCATION: CAT:

Description

Economical and versatile tape light with light output ranging from 110-310 lumens and run lengths up to 22ft

Features

- Unjacketed (IP54) or Jacketed (IP65) rating
- Linking accessories, controllers, receivers, power supplies, and extrusions are available for tape light (sold separately)

Mounting

Surface mount via attached 3M adhesive tape, mounting clips, or aluminum extrusions (sold separately)


Applications

Task or accent lighting, edge lighting, cabinetry, shelving, coves, staircases, toe kicks, railings, display cases




Technical Information

IP Rating	IP54				IP65	
Voltage	24V DC				24V DC	
CCT	2400K	2700K	3000K	4000K	2700K	3000K
CRI	94+					
Wattage	4.6W/ft				4.6W/ft	
Lumens	285Lm/ft	285Lm/ft	300Lm/ft	310Lm/ft	260Lm/ft	270Lm/ft
Max Run	22ft				22ft	
Cutting	3.94"				3.94"	
Dimming	5-100% with most ELV dimmers					
LED	LEDs spaced every 0.63"					
Beam	120°					
Operating Temp	5°C (41°F) to 70°C (158°F)					
Ambient Temp	-20°C (-4°F) to 40°C (104°F)					
Rating	cULus Listed, dry & damp locations				cULus Listed, wet locations	
Rated Life	50,000 Hours					




When using standard snap connectors, it is recommended to scrape off the coating from each conductor to ensure a proper connection. When using heavy duty snap connectors, this is only necessary for IP65 and IP68 types.

Dimensions: IP54 Unjacketed TLH

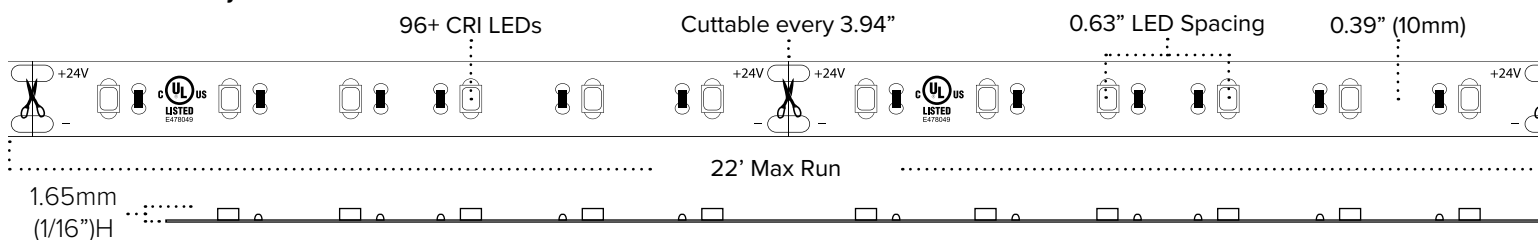


Dimensions: IP65 Jacketed LTH

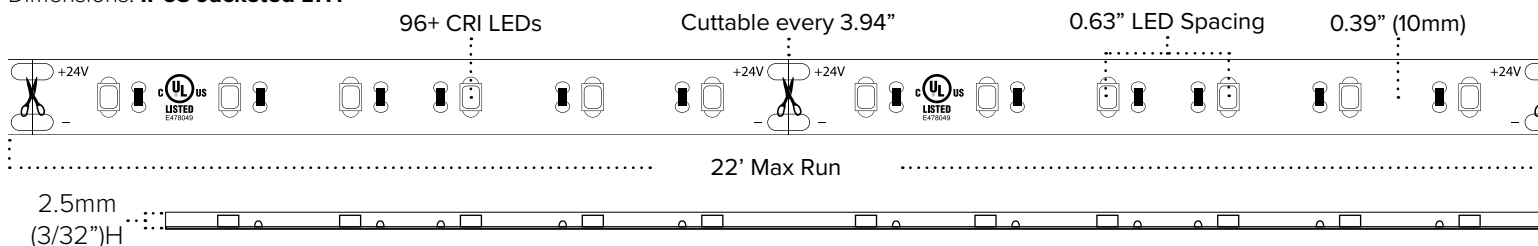

Ordering Information

24V TLH Series Static White

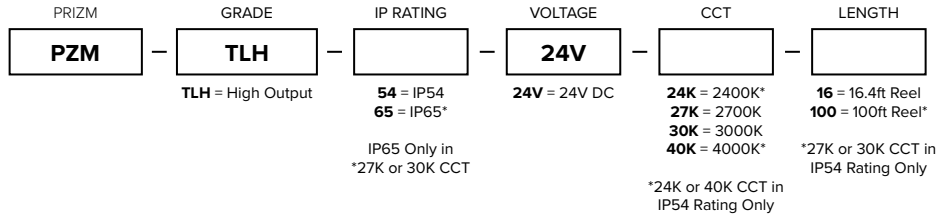

TLH IP54 16.4ft Reels include:

- Attached 3ft lead wire
- (3) TL-CONKIT power connectors
- (3) TruLink connector blocks

TLH IP65 16.4ft Reels include:

- (3) TL-CONKIT power connectors
- (1) Male IP65 power connector
- (1) Female IP65 power connector

TLH IP54 100ft Reels include:

- (5) TL-CONKIT power connectors
- (5) TruLink connector blocks

Double Row tape light is offered exclusively in Custom Cut (special order) lengths. Please contact us at: Quotes@PrizmLighting.com

Recommended Power Supplies

SERIES	RATED POWER AVAILABLE
LED-DR Series	30W, 60W, 96W, 150W
ELV Series	30W, 45W, 60W, 80W
ADPT-DRJ Series	30W, 60W, 96W

Connection Accessories

Image	Part Number	Description
	PZM-TL-CONKIT	TruLink 4-in-1 block connector kit with 36" lead wire (2pin, 18AWG wire); For dry, indoor location use only
	PZM-TL-BLKS	TruLink 4-in-1 block connector (2pin) (Bag of 10); For dry, indoor location use only
	PZM-TL-2PWR-HD	IP54 Power feed "Heavy Duty" snap connector to bare wires (2pin, 20AWG wire); For dry, indoor location use only
	PZM-TL-2JUMP6-HD	6" IP54 Tape-to-tape "Heavy Duty" snap jumper (2pin, 20AWG wire); For dry, indoor location use only
	PZM-TL-2JUMP24-HD	24" IP54 Tape-to-tape "Heavy Duty" snap jumper (2pin, 20AWG wire); For dry, indoor location use only
	PZM-TL-2SPL-HD	IP54 In-line splice "Heavy Duty" snap connector (2pin); For dry, indoor location use only
	PZM-TL-2JUMP65-.5	6" IP65 Power-to-power jumper (2pin) - for IP65 tape
	PZM-TL-2JUMP65-1	12" IP65 Power-to-power jumper (2pin) - for IP65 tape
	PZM-TL-2JUMP65-2	24" IP65 Power-to-power jumper (2pin) - for IP65 tape
	PZM-TL-ENDS65-10	End Caps (Bag of 10) - For IP65 or IP68 tape
	PZM-TL-CLIPS-15	Mounting clips (Bag of 15) - For IP65 or IP68 tape

NOTES
