

PROJECT: TYPE:

LOCATION: CAT:

Description

"Long-run" tape light provides max runs up to 65.6ft.

Features

- Unjacketed (IP54) rating
- 65.6 foot max run
- Cuttable every 1.97"
- Linking accessories, controllers, receivers, power supplies, and extrusions are available for tape light (sold separately)

Mounting

Surface mount via attached 3M adhesive tape, mounting clips, or aluminum extrusions (sold separately)

Applications


Task or accent lighting, edge lighting, cabinetry, shelving, coves, staircases, toe kicks, railings, display cases



Technical Information




IP Rating	IP54		
Voltage	24V DC		
CCT	2700K	3000K	4000K
CRI	90+		
Wattage	1.46W/ft		
Lumens	108Lm/ft	110Lm/ft	112Lm/ft
Max Run	65.6 feet (20m)		
Cutting	every 1.97"		
Dimming	Controllers or most low-voltage electronic dimmers / ELV Drivers		
LED	LEDs spaced every 0.33" (8.33mm)		
Beam	120°		
Operating Temp	5°C (41°F) to 70°C (158°F)		
Ambient Temp	-20°C (-4°F) to 40°C (104°F)		
Rating	cULus Listed, dry & damp locations		
Rated Life	50,000 Hours		

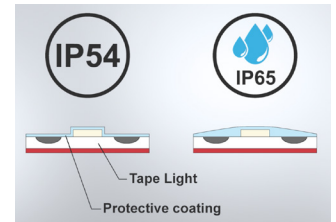


When using standard snap connectors, it is recommended to scrape off the coating from each conductor to ensure a proper connection. When using heavy duty snap connectors, this is only necessary for IP65 and IP68 types.

Dimensions: TLM IP54 Unjacketed

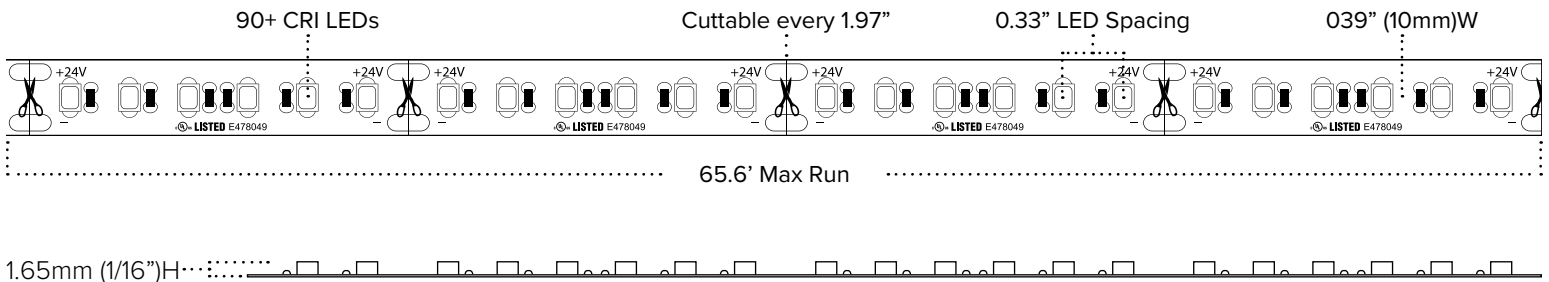

Ordering Information

24V 65.6ft Reels
TLM Series

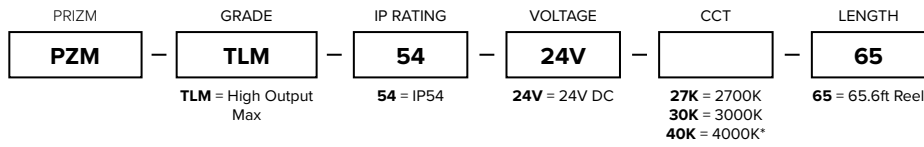

TLM (IP54) 65.6ft Reels include:

- Attached 3ft lead wire
- (3) PZM-TL-CONKIT power connectors
- (3) Connector blocks

Recommended Power Supplies

SERIES	RATED POWER AVAILABLE
LED-DR Series	30W, 60W, 96W, 150W
ELV Series	30W, 45W, 60W, 80W
ADPT-DRJ Series	30W, 60W, 96W

Connection Accessories

Image	Part Number	Description
	PZM-TL-CONKIT	4-in-1 block connector with 36" lead wire; For dry, indoor location use only
	PZM-TL-BLKS	4-in-1 block connector (Bag of 10); For dry, indoor location use only
	PZM-TL-2PWR-HD	IP54 Power feed "Heavy Duty" snap connector to bare wires (2-wire); For dry, indoor location use only
	PZM-TL-2JUMP6-HD	6" IP54 Tape-to-tape "Heavy Duty" snap jumper (2-wire); For dry, indoor location use only
	PZM-TL-2JUMP24-HD	24" IP54 Tape-to-tape "Heavy Duty" snap jumper (2-wire); For dry, indoor location use only
	PZM-TL-2SPL-HD	IP54 In-line splice "Heavy Duty" snap connector (2-wire); For dry, indoor location use only

NOTES
